


OMEGA FLEX
RF-Stick

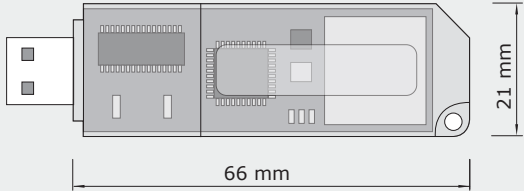

OMEGA FLEX RF-Stick

Technical data

Part number	342208V
Dimensions	Length: ca. 66 mm, Width: ca. 21 mm, Height: ca. 13 mm
Power supply	Via USB-Port
Connection	USB-port, for operating systems Windows 7™ and Windows 8™
Communication frequency	868 MHz
RF range	Up to 10 m
Temperature range	0 °C to + 60 °C
Environmental conditions	Not suitable for use in corrosive atmospheres (chlorine, ammonia, lime water). Maximum air humidity: 95 %
Service life of the RF-Stick	At least 10 years, USB plug: approx. 1.500 plugging cycles
Signaling LEDs	1 x Green = Data communication 1 x Red = Error 1 x Blue = Ready
Security requirements	Encrypted data transfer, 128 Bit/AES

Variants

The RF-Stick is available in three different packages:

RF-Stick (Art. Nr. 342208V)	Includes the RF-Stick and a CD-ROM only, for the functional extension of existing online and offline systems
RF-Stick Set (Art. Nr. 342189V)	Includes the OMEGA RF-Stick, RF-STICK MASTER, OMEGA SYSTEM MASTER, a CD-ROM with the CEStronics software suite as backup medium and a USB stick with program files and licences
RF-Stick Programming Package (Art. Nr. 342185V)	Includes a netbook with pre-installed CEStronics software suite with plant licence, OMEGA RF-Stick, RF-STICK MASTER, OMEGA SYSTEM MASTER, USB stick with licence file and data files, CD-ROM with the CEStronics software suite as backup medium

Ordering information

Quantity	Part number	Name	Special features