

Selection of DIN 18252/EN 1303 compliant designs



Double cylinder no. 810 PXM
Brass, satin nickel plated

Double cylinder no. 8710 PXM
With emergency and danger function
Brass, satin nickel plated
Locking on both sides



Single cylinder no. 851 1/2 PXM
Brass, satin nickel plated
Follower adjustable
in 12 positions



Knob cylinder no. 815 PXM
Brass, satin nickel-plated
Locking function on one side,
aluminum knob on the other side, NF,
various knob shapes available
(figure shows shape H)



Cam cylinder no. 5558/30 PXM
Brass, polished nickel plated
Locking movement 90°
Locking direction as desired
Fitting dimension 25 mm



Cylinder padlock no. 215 N/58 PXM
Lock case brass chromium velour finish
Shackle stainless steel
Case width 58 mm, height 50 mm
Key removable without locking
Shackle clearance 35 mm (standard)



Profile insert no. 802/5 PXM
Brass, satin nickel plated
One side locking,
the other side blind

Your technical adviser on security matters:



C.Ed. Schulte GmbH
Zylinderschlossfabrik
Friedrichstraße 243
D-42551 Velbert
☎ +49 2051 204 0
☎ +49 2051 204 229
✉ info@ces.eu

www.ces.eu





CES System PXM

Conventional key system with
patent protection

Subject to technical changes without notice · EN · V01 · 07.22

www.ces.eu

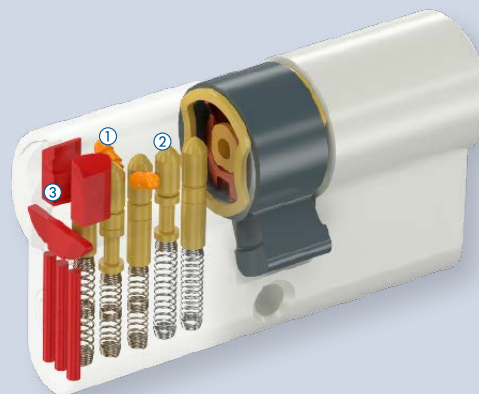

Innovative locking technology with legal protection

PXM locking system

- ① Generation of profile variants through additional pins
- ② 5 Pin tumblers (spring-loaded)
- ③ Anti-drilling and anti-pulling protection in the plug and housing (optional)

Stable nickel-silver key

- ④ Guiding groove extending along the entire cylinder plug which prevents breaking of the key
- ⑤ Handy key with a pleasant feel
- ⑥ High-quality look

Security card

CES only processes replacement orders and delivers system extensions if the security card supplied with the locking system is presented.

PXM system in line with DIN 18252/EN 1303

Stable nickel-silver key

The stable nickel-silver key is 3,5 mm thick and thus particularly handy. It is produced in accordance with DIN specifications. The key shank, which is at least 14 mm long, matches commercial handle sets with cylinder covering.

Thanks to the specially formed key tip, the key can be inserted into the cylinder without any effort. A guiding groove along the entire cylinder plug ensures the positive transfer of the key torque and prevents the key from breaking.

The additional locking medium clip (MIFARE®/LEGIC) on the mechanical key enables tried-and-tested locking technology to be combined with modern ID technology.



Accessories and special equipment

Modular system available

PXM profile cylinders are also available in a modular system. This means that the length of the cylinders can be adapted to the thickness of the door on-site, saving both time and money.

Optional anti-drilling and anti-pulling protection

Additional pins and plates made of hard metal which are fitted to the front end of the housing and the cylinder plug protect the cylinder from forced break-in methods.

Impact protection design

Seawater-resistant design

Wear-resistant design

Colours

Numerous cylinder colours are available. Upon request, also differently-coloured cylinder halves are available in a modular design.

Furniture and special cylinders

The PXM locking system can also be used to equip furniture and special cylinders from the CES programme.

Electronic access solutions

The CES cylinders in the PXM system can be combined with electronic locking systems from CES and the AccessOne access control system.