


CES AccessOne

Online Reader

Reader PHG Voxio

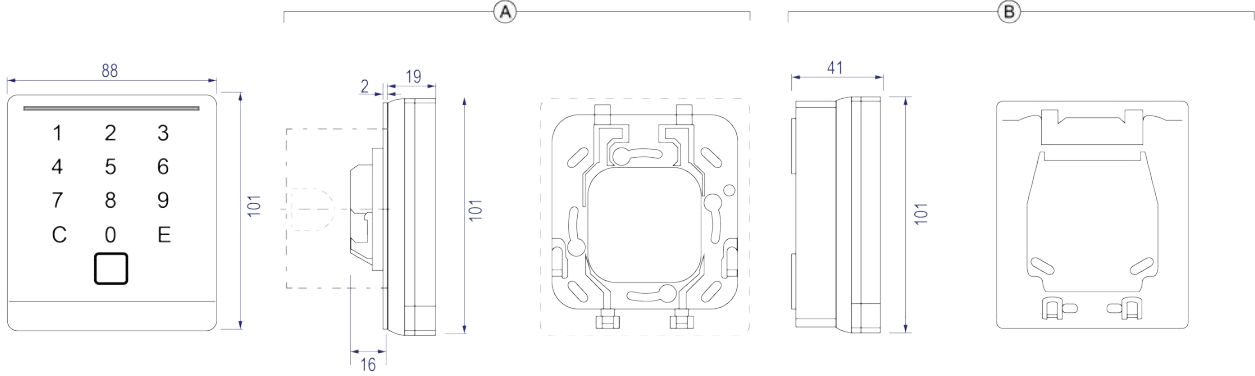

All dimensions in mm

A =Flush-mounted (UP)

B = Surface-mounted (AP)

CES AccessOne

Technical data

Article designation	Reader PHG Voxio (Surface-mounted / Flush-mounted Art.-Nr. 348004V / 348005V)
Version	Reader without display
Type	Surface-mounted and flush-mounted housings made of plastic
Operation	Contactless with locking medium; capacitive keypad
Connector type	8-pin screw/plug-in terminal
Tamper monitoring	Detection of attempts to pull unit away
Suitable locking media (MIFARE version only)	MIFARE® Classic® (1k/4k), MIFARE® DESFire® EV2 (UID conforming to ISO14443 and application), all ISO14443 locking media (not MIFARE Ultralight® C)
Reading range	Approx. 30 mm
Signalling	3 LEDs, RGB multicolour backlit surface for keypad and icon (brightness adjustable), 1 loudspeaker for acoustic signal (frequency adjustable)
Temperature range	Storage temperature -30°C to +70°C Operating temperature -20°C to +60°C
Prohibited atmospheres	Not suitable for use in corrosive atmospheres (chlorine, ammonia, lime water)
Protection class	IP65
Operating voltage	8-30 V DC(with internal polarity reversal protection)
CE approval	EN 301 489-1; EN 300 330 v2.1.1; EN 62368-1; EN 50364; EN 301 489-3; EN 301 489-17