
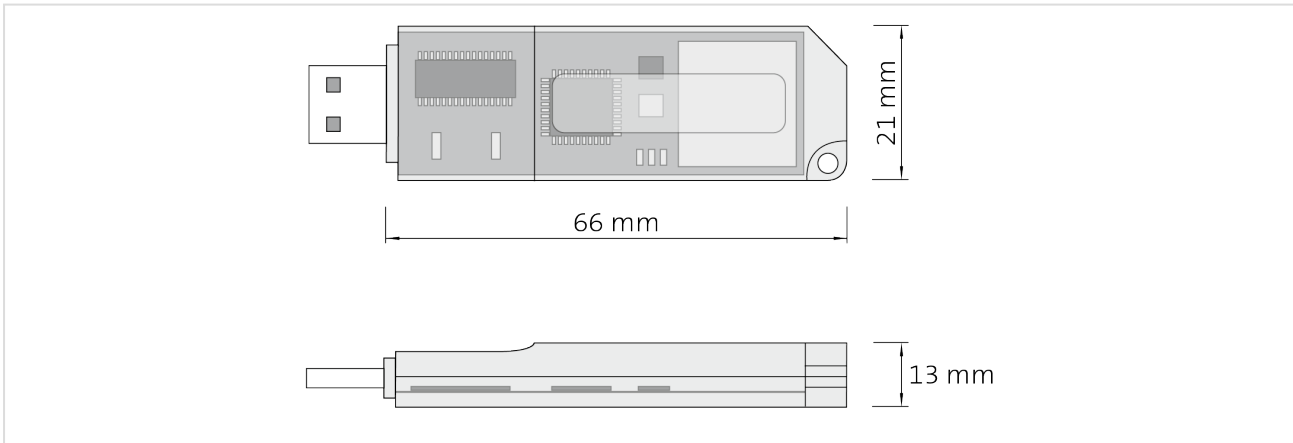


CES OMEGA FLEX

RF-Stick

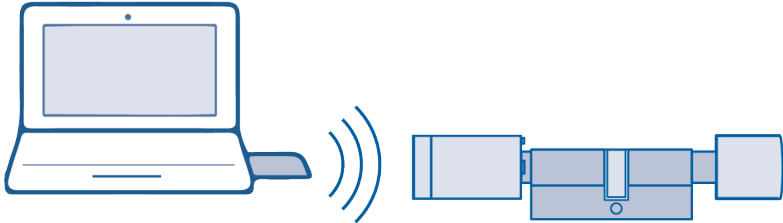

CES OMEGA FLEX - RF-Stick

Technical Data

Article number	342208V
Power supply	Via USB port
Connection	USB
Radio frequency	868 MHz
Range	Max. 10 m
Temperature range	0 °C to + 60 °C
Ambient conditions	Not suitable for use in corrosive atmospheres (chlorine, ammonia, lime water), humidity 0 - 95%, non-condensing
Useful life	RF-Stick: at least 10 years USB connector: max. 1,500 plug-in operations
Signalizing LEDs	Green = data processing Red = error Blue = ready
Safety requirements	Encrypted data transmission, 128 Bit/AES

Variants

Art. No. 342208V	RF-Stick (to extend existing systems)	- RF-Stick - User information
Art. No. 342189V	RF-Stick set (for new systems)	- RF-Stick - RF-Stick-Master - System-Master - CEStronics Suite - Locking system file and licences
Art. No. 342185V	RF-Stick programming package (for new systems)	- Netbook with pre-installed CEStronics Suite - RF-Stick - RF-Stick-Master - System-Master - CEStronics Suite - Locking system file and licences

Ordering information

Quantity	Article number	Name	Special feature